# CC SERIES

- COPPER
- CASED UPFLOW

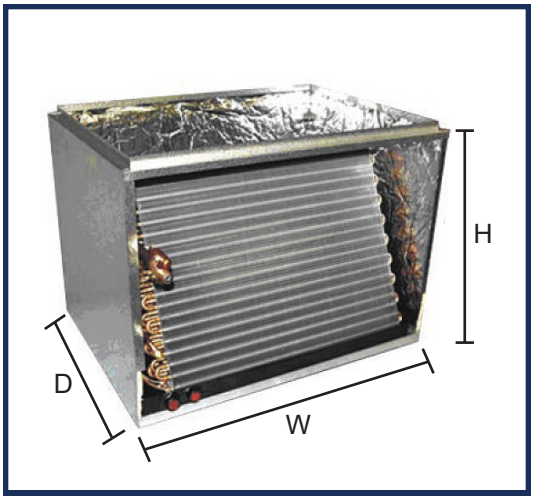


*Unit shown with service panels removed. Representative image only. Some models may vary in appearance. Left-hand shown.*

## STANDARD FEATURES

- Rifled copper tubing, enhanced aluminum fins.
- Upflow only. (Slab horizontal coils also available.)
- Immersion tested at 500 psi, followed by nitrogen pressurization and factory sealing to ensure optimal system integrity and long-term reliability.
- Schrader valve provided for pressure assurance testing.
- ***Left/right-hand standard refrigerant/plumbing connections:***
  - ***Liquid line:*** 3/8" ODS
  - ***Suction line:*** 7/8" ODS
  - ***Condensate Drains:*** 3/4" NPT
- Embossed galvanized cabinets standard. Fully insulated cabinets with faced insulation. Split access doors in front of cabinet for easy service access.
- Factory-mounted TXV (R-410A - AC & HP compatible).
- ETL listed for R410A, R454B, and R32 refrigerants (A2L Refrigerants certified with Refrigerant Detection System (RDS)).
- A2L refrigerants require a Refrigerant Detection System (RDS) for compliance. Light commercial A2L RDS kits sold separately.

## WARRANTY

- No hassle five-year limited warranty.

## UNIVERSAL A2L REFRIGERANT TECHNOLOGY FOR R32 & R454B SYSTEMS

## LIGHT COMMERCIAL A2L RDS KITS SOLD SEPARATELY

**IDEAL FOR USE WITH BOTH CASED AND UNCASED COILS, PLUS ALL AIR HANDLERS!**

Versa Dual Refrigerant Coils are easily configurable for use with either R32 or R454B refrigerant with proper metering device. Utilizing universal Refrigerant Detection Systems (RDS) to ensure regulatory compliance.

### TXV CHART

| COIL MODEL | A1 TXV - R410A | | A2L TXVS | | | |
|---|---|---|---|---|---|---|
| | | | R454B | | R32 | |
| | SINGLE CIRCUIT | DUAL CIRCUIT | SINGLE CIRCUIT | DUAL CIRCUIT | SINGLE CIRCUIT | DUAL CIRCUIT |
| CC072(A/B/C)(3/4)* | (4) 4202 | (4) 4200 x 2 | (J) 70012 | (J) 70011 x 2 | (D) 70015 | (D) 70014 x 2 |
| CC090(A/B/C)(3/4)* | (4) 70155 | (4) 4202 x 2 | (J) 70160 | (J) 70012 x 2 | (D) 70158 | (D) 70015 x 2 |
| CC120(A/B/C)(3/4)* | (4) 70156 | (4) 4202 x 2 | (J) 70157 | (J) 70012 x 2 | (D) 70159 | (D) 70015 x 2 |

### DRAIN PAN TEMPERATURE TABLE

| DRAIN PAN TYPE | TEMPERATURE LIMITS |
|---|---|
| Metal - High Temp | 600° |

R51341 11/25

ASSEMBLED IN THE USA — TRUSTED QUALITY SINCE 1975 | MEMBER AHRI AIR-CONDITIONING, HEATING, & REFRIGERATION INSTITUTE | HARDI PROUD MEMBER | ETL LISTED | R-410A — R-454B — R-32 REFRIGERANT READY WHEN PROPER METERING DEVICE IS USED | 5 YEAR LIMITED WARRANTY*

In keeping with its commitment to continuous improvement. Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. © 2026 Aspen Manufacturing. All Rights Reserved

**Phone:** 281.441.6500 **Toll Free:** 800.423.9007 **Fax:** 281.441.6510 **Customer Service:** info@aspenmfg.com **Warranty Team:** warranty@aspenmfg.com

## CC SERIES LIGHT COMMERCIAL: DIMENSIONAL DATA (In.)

| LIGHT COMMERICIAL COIL MODEL | DIMENSIONS | | | | | SHIPPING INFO. | |
|---|---|---|---|---|---|---|---|
| | CABINET* | | | | COIL | WEIGHT | MIN. ORDER QTY |
| | MIN. WIDTH | MAX. WIDTH | DEPTH | HEIGHT | WIDTH | | |
| | W" | W" | D" | H" | | LBS | |
| **SINGLE CIRCUIT COILS** | | | | | | | |
| CC072A3*-XXXL-000 | 30 | 36 | 21-1/2 | 22 | 24 | 84 | 4 |
| CC072B3*-XXXL-000 | 36 | 42 | 21-1/2 | 22 | 30 | 105 | 4 |
| CC072C3*-XXXL-000 | 42 | 48 | 21-1/2 | 22 | 36 | 126 | 4 |
| CC090A3*-XXXL-000 | 36 | 42 | 21-1/2 | 22 | 30 | 105 | 4 |
| CC090B3*-XXXL-000 | 42 | 48 | 21-1/2 | 22 | 36 | 126 | 4 |
| CC090C3*-XXXL-000 | 48 | 54 | 21-1/2 | 22 | 42 | 147 | 4 |
| CC120A3*-XXXL-000 | 36 | 42 | 21-1/2 | 22 | 30 | 105 | 4 |
| CC120B3*-XXXL-000 | 42 | 48 | 21-1/2 | 22 | 36 | 126 | 4 |
| CC120C3*-XXXL-000 | 48 | 54 | 21-1/2 | 22 | 42 | 147 | 4 |
| CC120D4*-505R-000 | 50-1/2 | 50-1/2 | 21-1/2 | 22 | 43 | 140 | 4 |
| **DOUBLE CIRCUIT COILS** | | | | | | | |
| CC072A4*-XXXL-12# | 30 | 36 | 21-1/2 | 22 | 24 | 103 | 4 |
| CC072B4*-XXXL-12# | 36 | 42 | 21-1/2 | 22 | 30 | 128 | 4 |
| CC072C4*-XXXL-12# | 42 | 48 | 21-1/2 | 22 | 36 | 154 | 4 |
| CC090A4*-XXXL-12# | 36 | 42 | 21-1/2 | 22 | 30 | 128 | 4 |
| CC090B4*-XXXL-12# | 42 | 48 | 21-1/2 | 22 | 36 | 154 | 4 |
| CC090C4*-XXXL-12# | 48 | 54 | 21-1/2 | 22 | 42 | 180 | 4 |
| CC120A4*-XXXL-12# | 36 | 42 | 21-1/2 | 22 | 30 | 128 | 4 |
| CC120B4*-XXXL-12# | 42 | 48 | 21-1/2 | 22 | 36 | 154 | 4 |
| CC120C4*-XXXL-12# | 48 | 54 | 21-1/2 | 22 | 42 | 180 | 4 |

**Notes:** Slabs are oriented with delta plates facing the side walls of the cabinet. Refrigerant and plumbing connections exit cabinet front. Top duct opening size can be obtained by subtracting 1-½" from width or depth. Bottom duct opening size can be obtained by subtracting 3/4" from width or depth. CC120D coil available only in 50-½" width, but can fit multiple furnace dimensions with supplied block off plates.
* Metering Device and Refrigerant = 4, J, or D
# Option -000 = Single Circuit
# Option -120 = Double Circuit, 50/50 circuit split
# Option -121 = Double Circuit, intertwined circuits

R51341 11/25

## HELPFUL LINKS

### *VIEW PRODUCT ONLINE*

***For full warranty terms and conditions, please refer to the Warranty Information section on Aspen's official website.***

### *VIEW VERSA DUAL REFRIGERANT COILS ONLINE*

***Learn more about Aspen's A2L Refrigerant Technology for R32 and R454B Systems.***

In keeping with its commitment to continuous improvement. Aspen Manufacturing reserves the right to make changes without notice and incurring obligation. To stay up-to-date with this product and Aspen's trusted line of coils, air handlers, and more, go to our website. © 2026 Aspen Manufacturing. All Rights Reserved

**Phone:** 281.441.6500 **Toll Free:** 800.423.9007 **Fax:** 281.441.6510 **Customer Service:** info@aspenmfg.com **Warranty Team:** warranty@aspenmfg.com