



A CSW Industrials Company

PRODUCT DATA SHEET

SURESEAL® FIT

The Original Waterless Inline Drain Trap Seal



Description

SureSeal® FIT waterless inline drain trap seal solves odor and bug problems associated with infrequently used floor drains. The seal is installed into the outlet of drain bodies or drain hubs to protect the trap seal from evaporation, creating a physical barrier that blocks sewer gases and their odors from escaping. SureSeal provides waterless trap seal protection equivalent to water-based trap primers. Its patented memory hinge delivers superior, longer-lasting operation. SureSeal can be easily retrofitted to older drains, as its various designs ensure compatibility with all other drain types.

Applications

For 2", 3", and 4" floor drains and strainers, easily retrofitting older drains to trap odors effectively. Recommended for shower, outdoor, basement, HVAC, water heater, and maintenance area floor drains, as well as residential and multi-unit bathrooms and kitchens.

Characteristics | Features

- Saves water—eliminates the need for trap primer
- Stops drain odors and bugs
- Simple one-piece installation
- Three press-fit models for 2", 3", and 4" that fit both cast iron or plastic floor drains
- Patented memory hinge ensures a complete seal every time
- Economical

Packaging

Code	Size	Qty. per Case	Lbs. per Case	Cubic Ft per Case
97047	2" Drain Trap Seal	24	1.05	0.07
97048	3" Drain Trap Seal	24	1.92	0.15
97049	4" Drain Trap Seal	24	4.95	0.37




Patent No. 9,010,383
State of Massachusetts approved
State of Wisconsin approved

SURESEAL® FIT

The Original Waterless Inline Drain Trap Seal

Installation Instructions 4"


1. Using your thumb and forefinger, grasp the SureSeal by the exterior gasket at the points marked by three lines and apply pressure so that the fins collapse towards you and the SureSeal can pass through the strainer throat. (Once the SureSeal has passed through the strainer throat, it will return to its original shape).
2. Insert the SureSeal into the outlet of the floor drain body at least 4.5" to 5.5" below the drain grate, ensuring the SureSeal is level and properly seated.
3. Replace the grate on the floor drain.

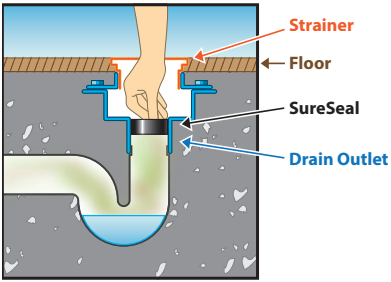

Installation Instructions 3" and 2"

1. Remove the grate on the floor drain.
2. Press fit the SureSeal into the drain body.
3. Replace grate on floor drain.

Additional information available at www.rectorseal.com.

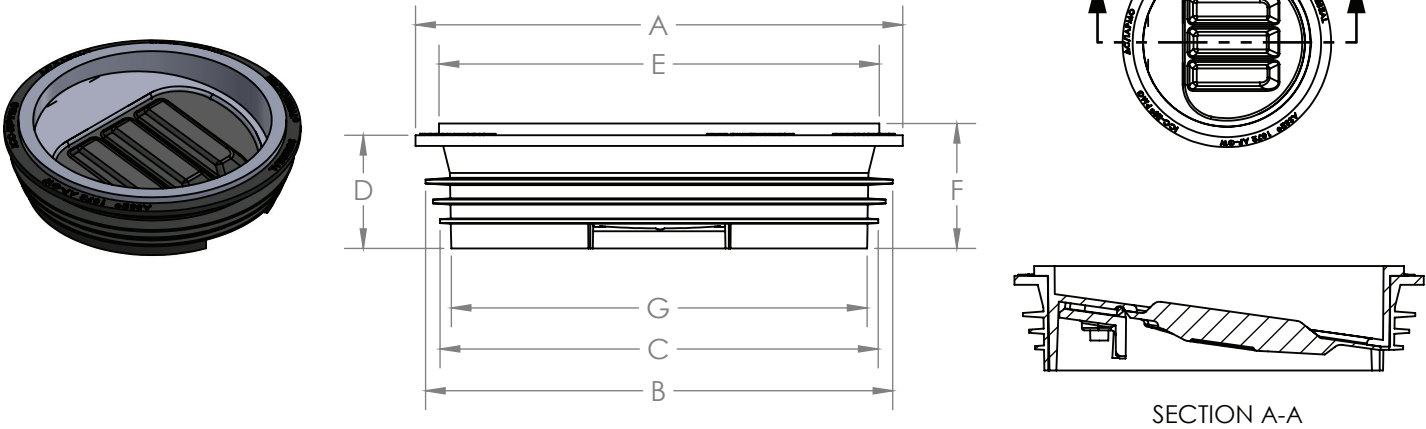

Model	A	B	C	D	E	F	G
2" Drain Trap Seal	2.35"	2.20"	2.00"	0.59"	2.10"	0.67"	1.79"
3" Drain Trap Seal	3.23"	3.10"	2.90"	0.75"	2.92"	0.83"	2.67"
4" Drain Trap Seal	4.36"	4.06"	3.94"	1.20"	3.33"	1.14"	3.21"

Limited Warranty



For more information on our product limited warranty, visit RectorSeal.com

Manufactured by

RectorSeal, LLC

2601 Spenwick Drive • Houston, TX 77055, USA • 800-231-3345 • Fax 800-441-0051 • rectorseal.com
3255 Wyandotte St. East Windsor, ON N8Y 1E9, Canada • 519-966-4901

A CSW Industrials Company. RectorSeal, the logos and other trademarks are property of RectorSeal, LLC, its affiliates or its licensors and are protected by copyright, trademark and other intellectual property laws, and may not be used without permission. RectorSeal reserves the right to change specifications without prior notice. ©2024 RectorSeal. All rights reserved. R51079-1124