



Mounting Solutions

Strong secure support with
exceptional range




WALL MOUNTING

Wall Bracket

Sliding Cross Bar Provides Exceptional Width Range

AU550
Bottom Bar: 550
Vertical Bar: 450
Cross Bar: 850
Thickness: 1.8
Loading(kg): 200

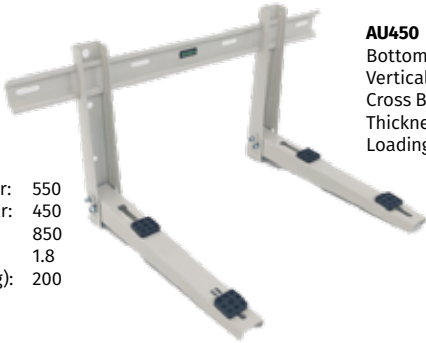

AU450
Bottom Bar: 450
Vertical Bar: 350
Cross Bar: 700
Thickness: 1.5
Loading(kg): 100

FEATURES

- Strong secure support
- Powder coat finish
- Includes level for convenience
- Complete with fasteners, nuts & bolts
- Pre-assembled ready for quick installation

Max Load Capacity

AU450 - 100kg
AU550 - 200kg
AU550-SS - 200kg

PRODUCT CODES

Product Code	Description	Qty
13170 (AU450)	Wall Bracket – powder coated	6
13171 (AU550)	Wall Bracket – powder coated	4
13176 (AU550-SS)	Wall Bracket – Stainless Steel	4

AU550-SS
Bottom Bar: 550
Vertical Bar: 450
Cross Bar: 850
Thickness: 1.8
Loading(kg): 200




AVAILABLE IN
STAINLESS STEEL

ROOF MOUNTING

Roof Bracket

Sliding Cross Bar Provides Exceptional Width Range

HP049C
Length: 1000
Width: 500
Supporting Bar1: 500
Supporting Bar2: 230
Thickness: 2
Loading(kg): 200

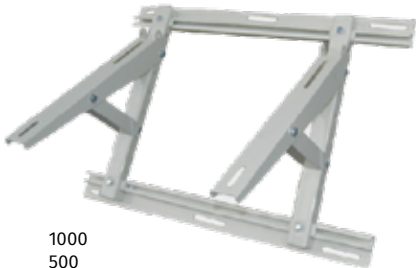

FEATURES

- Powder coated finish
- Complete with fasteners, nuts & bolts
- Adjustable angle to suit all applications

Max Load Capacity

HP049C - 200kg

PRODUCT CODES

Product Code	Description	Qty
13172 (HP049C)	Adjustable Roof Bracket – powder coated	4



S-5! HVAC Mounting Kits

Introducing the new HVAC Roof Mounting Kits — engineered for fast, secure installation on Kliplok, Trimdek, and LokSeam type roofs.

APPLICATION • Each kit provides a purpose-designed mounting solution that simplifies the process for HVAC technicians, ensuring strength, reliability, and compatibility with Australian roof profiles.

PRODUCT CODES

Product Code	Size	Quantity
S5KLOK	Kliplok Kit	1
S5SLOK	LokSeam / Snap Lock Kit	1
S5TDECK	Trimdek / Corrugated Kit	1

Levelling hardware included in all kits



S-5!
The Right Way

FEATURES

- Strong secure support
- Includes levelling hardware
- Complete with fasteners, nuts & bolts
- Quick installation

Required

You will also need Strut Channels (sold separately)



KLIPOK KIT

- | | |
|-----------------------|--------------------------------------|
| 4x S-5-K Grip Mini NB | 1x GF25K-A GF Leveler kit |
| 4x CF for GRIPPERFIX | 4x M8 x 40 bolt & Nut for GRIPPERFIX |
| 4x S-5-GXM 10 Inserts | 4x M8 x 17 bolt Torx |
| 4x S-5-GXM 50 Inserts | |



TRIMDEK / CORRUGATED KIT

- | | |
|---------------------------------------|--------------------------------------|
| 4x EF for GRIPPERFIX (Tab & 2 Screws) | 4x M8 x 40 bolt & Nut for GRIPPERFIX |
| 1x GF25K-A GF Leveler kit | 4x M8 x 17 bolt Torx |



LOKSEAM / SNAP LOCK KIT

- | | |
|---------------------------|--------------------------------------|
| 4x S-5-U Mini NB | 4x M8 x 40 bolt & Nut for GRIPPERFIX |
| 4x CF for GRIPPERFIX | 4x M8 x 17 bolt Torx |
| 1x GF25K-A GF Leveler kit | |



S-5! Struts

Once you've selected the right kit for your roof type, pair it with 600 mm or 1200 mm struts to complete your professional mounting system.


PRODUCT CODES

Product Code	Size	Set
S51200	1200mm	2
S5600	600mm	2

SURFACE MOUNTING

StrutFoot

SBR Recycled Rubber Feet

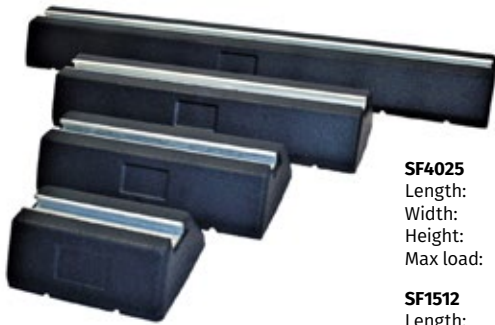

SF4025
Length: 250
Width: 180
Height: 95 mm
Max load: 160kg

SF1512
Length: 1200
Width: 130
Height: 150 mm
Max load: 645kg

FEATURES

- Recycled SBR from truck tyres
- Compatible with Unistrut systems
- Robust and weighted product to reduce product movement on roof
- Pre galvanised channel
- Practical and versatile 6-feet range for pipe work and cable trays
- For smaller outdoor condensing units or air source heat pump installations
- Vibration and noise absorption

*Unistrut not included

PRODUCT CODES


Product Code	Description	Qty
13139 (SF4025-SFR 250)	Rubber Feet Inc Channel 250	1
13140 (SF4040-SFR 400)	Rubber Feet Inc Channel 400	1
13141 (SF4060-SFR 600)	Rubber Feet Inc Channel 600	1
13142 (SF4010-SFR 1000)	Rubber Feet Inc Channel 1000	1
13143 (SF4525-SFR 250 Low)	Rubber Feet Inc Channel	1
13144 (SF4540-SFR 400 Low)	Rubber Feet Inc Channel	1
13145 (SF1560-SFR 600 High Block)	Rubber Feet Inc Channel High Block 600	1
13146 (SF1512-SFR 1200 High Block)	Rubber Feet Inc Channel High Block 1200	1

Rubber Mounts


Anti Vibration Rubber Feet Mountings



13180
Length: 100 mm
Width: 100 mm
Height: 73 mm
Max load: 110kg



13179
Length: 105 mm
Width: 45 mm
Height: 60 mm
Max load: 80kg

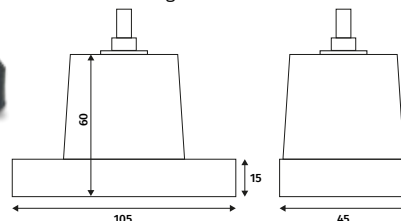

FEATURES

- Set of 4 rubber feet mountings
- Solid rubber construction
- Reduces vibration and noise for AC outdoor units
- Fixed-height design for flat surfaces

PRODUCT CODES

Product Code	Description	Combined Max Load	Set
13179	Rubber Mount 60mm	320kg	4
13180	Rubber Mount 73mm	440kg	4

PVC Mount Blocks

Air Conditioner Support Blocks



Q350
Length: 350
Width: 105
Height: 95mm
NW: 1.1kg
Loading capacity: 150kg

Q450
Length: 450
Width: 105
Height: 95mm
NW: 1.42kg
Loading capacity: 150kg



FEATURES

- PVC Material
- UV-resistant
- Complete with bolts & nut


*Each set contains 2 x Mount Blocks

PRODUCT CODES

Product Code	Description	Set
13173 (Q350)	PVC Mount Blocks 350	1
13174 (Q450)	PVC Mount Blocks 450	1
13181 (WQ450)	PVC Mount Blocks 450	1



WQ450
Length: 450
Width: 120
Height: 75mm
NW: 0.75kg
Loading capacity: 150kg

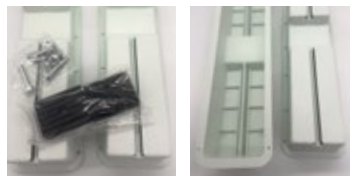

Waffle Pad

Anti-Vibration Waffle Pad

13177

Width: 450mm
Depth: 450mm
Height: 10mm
Weight: 2Kg

Case Width: 460mm
Case Depth: 460mm
Case Height: 125mm
Case Weight: 20Kg

APPLICATION • Used for heavy machinery such as air conditioners and pumps • Waffle Pads are used to reduce noise and vibration and to eliminate the need for bolting down • The flat configuration hardly elevates the machine to be isolated and in many cases this low cost method conveniently solves or prevents a problem that does not warrant the use of either rubber or spring mountings • As a general rule, pads are recommended to eliminate bolting, for minor vibration problems in upper stories or for ground floor and non critical applications

RECOMMENDED FOR • Anti-Vibration Waffle Pad are ideally suited to applications in the air conditioning, refrigeration, irrigation industries due to their resilience and ability to withstand severe operating conditions.


Waffle pads have a grid pattern which make them non-slip, they are also designed to minimize the transmission of shock, noise and vibration caused by machines.

FEATURES

- Superior carrying capacity and grip, with a built in anti-contamination seal.
- The grid prevents rib collapse and forms suction pockets for enhanced grip on uneven surfaces.
- Resistant to oils and has superior physical qualities.

PRODUCT CODES

Product Code	Description	Qty
13177	Waffle Pad 10 (450 x 450 x 10)	10
13178	Waffle Pad 20 (450 x 450 x 20)	5

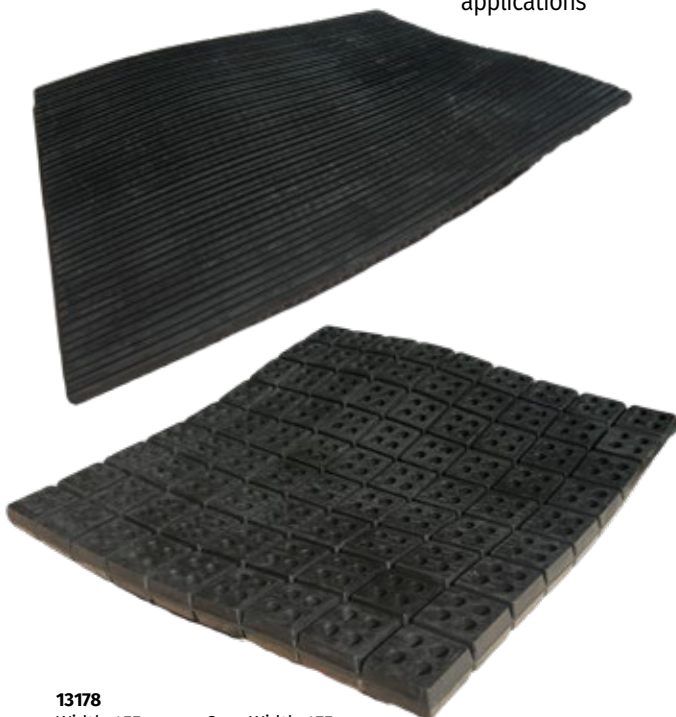

13178

Width: 455mm
Depth: 455mm
Height: 2mm
Weight: 4.6Kg

Case Width: 475mm
Case Depth: 475mm
Case Height: 140mm
Case Weight: 23.1Kg

PolySlab



FEATURES

- Australian made
- Made of recycled materials
- Eco-friendly & UV resistant
- Impact resistant & ultralight weight
- Supports all split system air conditioning units
- Stackable design

Air Conditioner and Equipment Bases

Lightweight universal polymer equipment base for hot water systems • For indoor and outdoor use

APPLICATION • Supporting split system air conditioning units and equipment

DESCRIPTION AND LOAD RATING

Product Code	Description	Load Rating
12905	1130 x 650 x 51mm - 6.5kg	160kg
12904	885 x 465 x 51mm - 2kg	160kg
12903	640 x 340 x 51mm - 1.6kg	120kg

Underside Ribs

The location, thickness, and depth have been designed to maximise strength.

Ultra Lightweight

All PolySlab Bases replace heavy, cumbersome, and often fragile pre-cast concrete slabs. Avoid injuries and OH&S litigation with the durable, stylish, lightweight alternative.

Multiple Channel Supports

Transfer weight of the unit directly to the ground to prevent sinking. The design also allows products to 'lock in' and stack easily for transport.

Perimeter Support

Combined with the channel supports gives the greatest possible surface area support.



PolySlab is the modern, environmentally responsible alternative to bulky concrete bases. Constructed from 100% recycled materials, PolySlab keeps equipment supported while reducing waste and promoting sustainable building practices. Its lightweight, UV-stable design makes installation simple and safe, while its strength and durability ensure long-term performance around your home or business. Choose PolySlab for a cleaner, greener and smarter foundation for your AC, pump or hot water system.

ACCESSORIES

Mighty Bracket™

Mini-split installation support tool



Mighty Bracket™

Mini-split Installation Support Tool

FEATURES

- Allows single person installation
- Simple clip on support
- Does not damage walls
- Use on most brands of mini-splits
- Folds for easy storage
- Includes tote bag



APPLICATION • Hook onto mini-split mounting plate to hold mini-split unit securely in place while installing refrigerant lines, condensate line and electrical hookup.

USER INSTRUCTIONS • **1.** Attach Mounting Hooks of Mighty Bracket to the mini-split mounting plate tabs. (If no tabs are present on the mounting plate, Mighty Bracket hooks can be attached by screws threaded into the wall stud.) **2.** Place Foot Supports flat against the wall. (If necessary to avoid potential wall scratching, place clean towel or cardboard between support foot and wall surface) **3.** Position Level Adjustment Pins to make Support Arm of the brackets horizontal. **4.** Position lift Gates at the end of Support Arms to make sure the unit cannot slide off. **5.** Place protective Sleeve Socks over Gates to avoid scratching the unit. **6.** Set unit securely onto the top of the Support Arms. **7.** Connect refrigerant lines using RectorSeal® NoKink™.* **8.** Connect condensate drain piping and electrical wiring. **9.** Carefully lift and place the indoor unit onto top tabs of mounting plate. **10.** While ensuring unit does not fall, carefully remove Mighty Bracket and installation is complete.

* When paired with RectorSeal® NoKink™, Mighty Bracket™ allows simple installation without damaging or kinking copper refrigerant lines.

PRODUCT CODE

Product Code	Description	Qty
97705	Mini-split support tool	4

Drain Hose

Mini-split Condensate Drain Hose



Length: 50m/Roll
16mm ID / 21mm OD

FEATURES

- UV-resistant
- 50m Roll
- Cut to length
- Convenient storage carton

PRODUCT CODES

Product Code	Description	Qty
13175 (GH-7004A)	Drain Hose	1



A CSW Industrials Company

RectorSeal Australia Pty Ltd. • PO Box 5266 Brendale, Qld 4500 • 1300 77 2878 • [rectorseal.com.au](https://www.rectorseal.com.au)

All information is believed to be current at the time of printing, but our policy is one of continuous development. RectorSeal makes no warranties, express or implied, as to its accuracy. RectorSeal reserves the right to discontinue, update or change the information at any time without notice or without incurring obligations. RectorSeal®, the logos and other trademarks are property of RectorSeal, LLC, its affiliates or its licensors and are protected by copyright, trademark and other intellectual property laws, and may not be used without permission. RectorSeal reserves the right to change specifications without prior notice. ©2025 RectorSeal. All rights reserved.