



SUBMITTAL DATA SHEET



A CSW Industrials Company

Ghost Remote: Condensate Mini Pumps

100-240V AC 50/60Hz
83909

Project Information:

Job Name: _____

Location: _____

Engineer: _____

Submitted to: _____

For: Reference Approval Construction

Submitted by: _____

Reference: _____

Submittal Information:

Approval: _____

Date: _____

Construction: _____


Unit #: _____

Drawing #: _____

(Fig. I) Product Image:



(Fig. II) Typical Pump Locations:

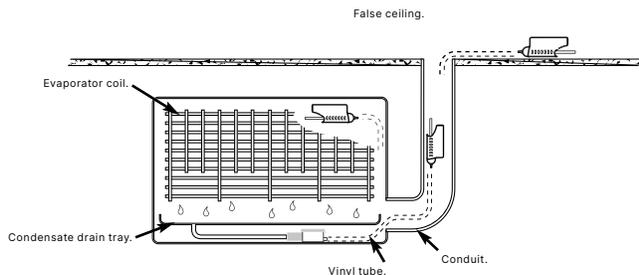

I. Ordering Information:

Product Code	83909
Model	Ghost Remote
Carton Qty	1
Carton Weight	1.46

II. Product Specifications:

Pump Type	Rotary Diaphragm
Pump Length	4.9"
Pump Width	1.5"
Pump Height	1.9"
Capacity	10.6GPH @ 0' Head / 3.6GPH @ 32.8'Head
Max BTUs	157,000
Max Head in Feet	32.8
Max Temperature	158°F
Max Suction Lift	6.6ft
Sound Level	16dB(A) @ 3.3ft (1M)
Safety Switch	3A NC
Voltage	100-240v
Class	Class II Appliance
Protection/Rated	Fully potted, IP-45
Remote Reservoir	Y
Plenum Rated	N
Variable Speed	N
Plug & Play	Y

Sound level and pump performance varies with voltage frequency.

III. Carton Contents:

- Pump Assembly
- 1/4in i.d. Vinyl Breather Tube
- Assembled Inline Reservoir, including:
 - Lid & Sensor Cable
 - Float
 - Filter
 - Reservoir
- 4.9ft Length of 1/4in i.d. Vinyl Tube
- 5/8in i.d. Inlet Tube
- 2 x Self Adhesive Velcro Strips
- 4 x 7.9in x 0.19in Cable Ties
- Check Valve
- Anti-siphon Device
- 1A Fuse
- Install Manual

Pump Selector & Wiring Diagrams
Available at rs.today/ghost-pumps




Ghost Remote

Condensate Mini Pumps

100–240V AC 50/60Hz
83909



Ghost Pumps BTU Calculator

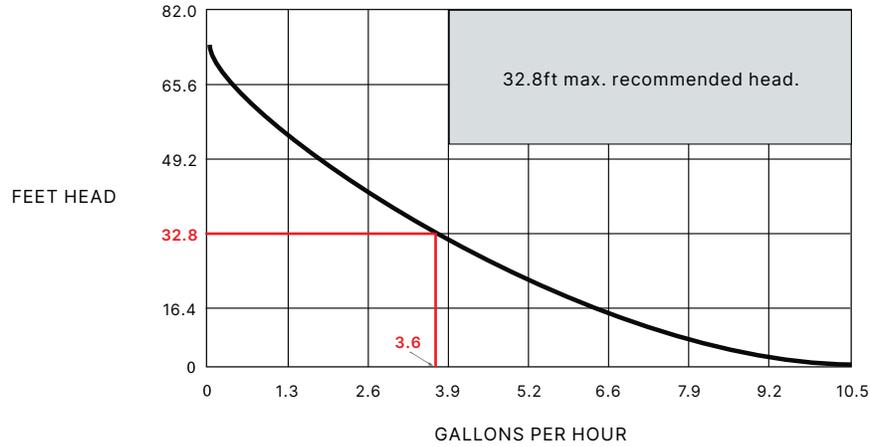

RectorSeal® • 2601 Spenwick Drive • Houston, TX 77055 • 800-231-3345 • rectorseal.com

A CSW Industrials Company. RectorSeal, the logos and other trademarks are property of RectorSeal, LLC, its affiliates or its licensors and are protected by copyright, trademark and other intellectual property laws, and may not be used without permission. RectorSeal reserves the right to change specifications without prior notice.

©2025 RectorSeal. All rights reserved. R50326-2512